


24-HOUR ANALOG TIMER 24 小时定时器

本产品能根据用户设定的时间，自动打开和关闭各种用电设备的电源。控制对象可以是路灯、灯箱、霓虹灯、生产设备、农业养殖、仓库排风除湿、自动预热、广播电视设备等最理想的控制产品。

The products according to the time set by the user, automatically turn on and turn off the variety of electrical equipment. Control object can lights, light boxes, neon signs, production equipment, agriculture, aquaculture, warehouse exhaust dehumidifier automatically preheat optimal control products, such as radio and television equipment.

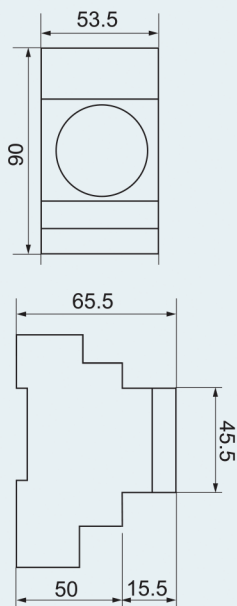

型号	KUL 181d
工作电压	AC 110V/220V/240V 50-60Hz
电力消耗	2.5VA
触点容量	AC 220V 16A
接触电阻	≤ 50MΩ
绝缘电阻	≥ 100MΩ
工作环境温度	-10°C ~ +55°C
晶振准确性	≤ 2S/天 25°C
输出接点能力	控制灯：1000W 阻性负载：16A/250VAC(cosΦ=1) 感性负载：3A/250VAC(cosΦ=0.6)
断电保护	充电 24 小时，断电后可持续工作 200 小时
时间范围	24h
储电时间	200h (220V) ， 100h (110V)
最小设定单位	15 分
设定次数	15 分 / 次 96 次
外形尺寸	90×54×65mm
重量	152g
安装方式	导轨安装

Item No.	KUL 181d
Operating Voltage	AC 110V/220V/240V 50-60Hz
Power Consumption	2.5VA
Contact Capacity	AC 220V 16A
Contact Resistance	≤ 50MΩ
Insulation Resistance	≥ 100MΩ
Operating Temperature	-10°C ~ +55°C
Accuracy	≤ 2S/day 25°C
Contact Capacity	Lamp Load : 1000W Resistive Load : 16A/250VAC(cosΦ=1) Inductive Load : 3A/250VAC(cosΦ=0.6)
Working reserve time	200 hours after recharging 24 hours
Full Timing Range	24h
Storage Battery	200h (220V) ， 100h (110V)
Minimum Setting Unit	15 Minuters
Setup Times	15 Minuters/time 96 Time
Dimension	90×54×65mm
Weight	152g
Installing Mode	DIN rail mounting